



AudioCodes 310HD

User Login= **admin/1234**

The screenshot shows the web interface of an AudioCodes 310HD IP phone. The browser address bar shows the URL `http://192.168.88.237`. The page title is "310HD" and the navigation menu includes "Home" and "Log Off". The main content area is titled "System Information" and displays the following details:

Model Name	310HD
Firmware Version	1.4.1_build_32_5
Release Date	12 July 2011 18:18:53

A dialog box titled "ต้องการการยืนยันตัวตน" (Authentication Required) is overlaid on the page. It contains the following information:

http://192.168.88.237 ต้องการชื่อผู้ใช้และรหัสผ่าน ข้อความจากเว็บ: "IP Phone"

ชื่อผู้ใช้: User : admin

รหัสผ่าน: Password : 1234

Buttons: (OK), (Cancel)

ใส่ค่า SipProxy

The screenshot shows the 'SIP General' configuration section. A red box highlights the following settings:

SIP Transport Protocol:	UDP
SIP Local Port:	5060
Gateway Name:	catnextgen.com
PRACK Mode:	Enable
Enable RPORT:	Enable

Other visible settings include: Include PTIME in SDP: Disable, Enable Keep Alive using OPTIONS: Disable, Connect Media on 180 Response: Disable, Block Caller ID on Outgoing Calls: Disable, Incoming Anonymous Call Blocking: Disable.

The screenshot shows the 'SIP Proxy and Registrar' configuration section. A red box highlights the following settings:


Use SIP Proxy:	Enable
Proxy IP Address or Host Name:	catnextgen.com
Proxy Port:	5060
Maximum Number of Authentication Retries:	5
Use SIP Proxy IP and Port for Registration:	Disable
Use SIP Registrar:	Enable
Registrar IP Address or Host Name:	catnextgen.com
Registrar Port:	5060
Registration Expires:	120 Seconds
Use SIP Outbound Proxy:	Enable
Outbound Proxy IP Address or Host Name:	202.129.61.102
Outbound Proxy Port:	5060
Use Redundant Proxy:	Disable

A red text box notes: "Oneconnect port = 5060, Cloud PBX port = 5063".

The screenshot shows the 'Dialing Parameters' configuration section. A red box highlights the following settings:

Dialing Timeout:	5	Seconds
Phone Number Length:	19	Digits
Enable Dialing Complete Key:	Enable	
Dialing Complete Key:	#	

Other visible settings include: Dial Tone Timeout: 30 Seconds, Reorder Tone Timeout: 40 Seconds, No Answer Call Timeout: 60 Seconds, Howler Tone Timeout: 120 Seconds, Secondary Dial Tone: Disable, DTMF Transport Mode: RFC 2833.

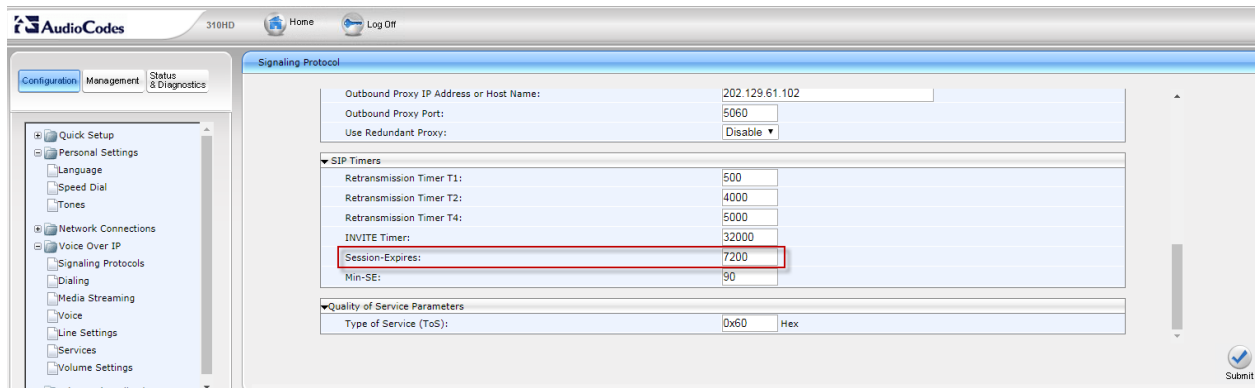

ใส่ค่า SipAccount

